

SIRIUS HRI

Metal halide lamps



Areas of application


- Concert lighting
- Club and disco
- Stage and theatre
- Studio, TV and film
- Architecture & Architainment

Product family benefits


- Lightweight and compact reflector lamps
- Perfectly suited for small and lightweight moving heads
- Optimized burner design allows any burning position
- High luminance through very short arc and high pressure
- Bright light for brilliant light effects
- Long lifetime
- Easy lamp replacement
- Stable light output over the entire lifetime




Product family datasheet




Product line drawing




Product line drawing




Product line drawing




Product line drawing




Product line drawing

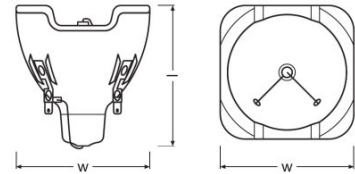


Product line drawing



Product line drawing



Product line drawing

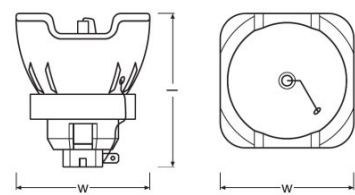

Product line drawing

Product family datasheet

Technical data

Product description	Electrical data		Photometrical data				Light technical data		Dimensions & weight	
	Nominal wattage	Nominal current	Nominal luminous flux	Color temperature	Color rendering index Ra	Maximum color temperature	Focal length	Aperture window, maximum	Diameter	Length
SIRIUS HRI 100 W	100.00 W	1.8 A	3680 lm	9000 K	60	9300 K	30.0 mm	5x3.8 mm	45.0 mm	53.0 mm
SIRIUS HRI 132 W SC	132.00 W	1.8 A	5150 lm	9200 K	60	9200 K	37.7 mm	5x3.8 mm	46.0 mm	max. 44 mm
SIRIUS HRI 140 W RO	140.00 W	1.9 A	5400 lm	9200 K	60	9200 K	37.7 mm	5x3.8 mm	46.0 mm	max. 44 mm
SIRIUS HRI 190 W+	190.00 W	2.7 A	8100 lm	8200 K	73	8200 K	34.5 mm	5x3.8 mm	51.0 mm	54.2 mm
SIRIUS HRI 230 W	230.00 W	3.3 A	9500 lm	8000 K	75	8000 K	34.5 mm	5x3.8 mm	51.0 mm	54.5 mm
SIRIUS HRI 231 W	231.00 W	3.3 A	10800 lm	8000 K	75				51.0 mm	50.0 mm
SIRIUS HRI 280 W	280.00 W	4 A	11500 lm	7800 K	78	7800 K	35.5 mm	5x3.8 mm	51.0 mm	54.5 mm
SIRIUS HRI 280 W RO	280.00 W	4 A	11500 lm	7800 K	78				51.0 mm	54.5 mm
SIRIUS HRI 281 W	281.00 W	4 A	13000 lm	7800 K	78				51.0 mm	50.0 mm
SIRIUS HRI 330 W	330.00 W	5 A	12000 lm	7400 K	85	7400 K	31.0 mm	8.0 mm	58.0 mm	66.0 mm
SIRIUS HRI 330 W X8	330.00 W	4.4 A	18000 lm	8000 K	85				58.0 mm	66.0 mm
SIRIUS HRI 330 W XL	330.00 W	5 A	16500 lm	7250 K	71				56.0 mm	63.0 mm
SIRIUS HRI 371 W	371.00 W	5 A	18300 lm	7650 K	85				58.0 mm	72.0 mm
SIRIUS HRI 370W LL	370.00 W	5 A	18000 lm	7400 K	86				58.0 mm	72.0 mm
SIRIUS HRI 371 W S	371.00 W	5 A	19800 lm	7650 K	85				58.0 mm	72.0 mm
SIRIUS HRI 440 W	440.00 W	5.3 A	20000 lm	7000 K	80	7000 K	41.0 mm	8.0 mm	58.0 mm	71.0 mm
SIRIUS HRI 440 W H	440.00 W	5.3 A	18000 lm	7000 K	75				65.0 mm	60.0 mm
SIRIUS HRI 440 W S	440.00 W	4.4 A	22800 lm	7000 K	80				11.8 mm	71.0 mm
SIRIUS HRI 461 W	461.00 W	5.3 A	24000 lm	7500 K	80				60.0 mm	67.0 mm
SIRIUS HRI 470 W	470.00 W	5.3 A	20500 lm	7000 K	80				58.0 mm	71.0 mm
SIRIUS HRI 461 W S	461.00 W	5.3 A	24000 lm	7500 K	80				60.0 mm	67.0 mm
SIRIUS HRI 470 W S	470.00 W	5.3 A	21500 lm	7000 K	80				58.0 mm	71.0 mm
SIRIUS HRI 470 W RO	470.00 W	5.3 A	19500 lm	7500 K	80				60.0 mm	67.0 mm

Product family datasheet

Product description	Lifespan	Capabilities		Certificates & standards
	Lifespan	Burning position	Cooling	EEI – Energy Label
SIRIUS HRI 100 W	6000 h	Any	Forced	B
SIRIUS HRI 132 W SC	6000 h	Any	Forced	A
SIRIUS HRI 140 W RO	6000 h	Any	Forced	A
SIRIUS HRI 190 W+	3000 h	Any	Forced	A
SIRIUS HRI 230 W	2500 h	Any	Forced	A
SIRIUS HRI 231 W	2000 h	Any		A
SIRIUS HRI 280 W	2000 h	Any	Forced	A
SIRIUS HRI 280 W RO	2000 h	Any		A
SIRIUS HRI 281 W	2000 h	Any		A
SIRIUS HRI 330 W	1500 h	Any	Forced	
SIRIUS HRI 330 W X8	1500 h	Any		A
SIRIUS HRI 330 W XL	1500 h	Any		
SIRIUS HRI 371 W	1500 h	Any		
SIRIUS HRI 370W LL	6000 h	Any		
SIRIUS HRI 371 W S	1500 h	Any		
SIRIUS HRI 440 W	1500 h	Any	Forced	A
SIRIUS HRI 440 W H	1500 h	Any		
SIRIUS HRI 440 W S	1500 h	Any		A
SIRIUS HRI 461 W	1500 h	Any		
SIRIUS HRI 470 W	1500 h	Any		
SIRIUS HRI 461 W S	1500 h	Any		
SIRIUS HRI 470 W S	1500 h	Any		
SIRIUS HRI 470 W RO	1500 h	Any		A

Product family datasheet

Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, SIRIUS HRI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.