

QTP-OPTIMAL 1X54...58

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable



Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: up to 100,000 h (temperature at $T_c = 65^\circ\text{C}$, max. 10 % failure rate)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

Technical data

Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Maximum output power	58 W
Efficiency in full-load	92 % ¹⁾
Operating frequency	40...50 kHz
Max. ECG no. on circuit breaker 10 A (B)	12 ²⁾
Max. ECG no. on circuit breaker 16 A (B)	19 ²⁾

¹⁾ at 230 V, 50 Hz


²⁾ Type B

Light technical data

Starting time	15 s ¹⁾
---------------	--------------------

¹⁾ If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

Dimensions & weight

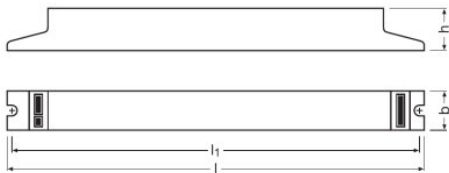

Length	2800 mm
Width	300 mm
Height	210 mm
Mounting hole spacing, length	270.0 mm
Product weight	18000 g

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

¹⁾ Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	100000 h ¹⁾
--------------	------------------------

¹⁾ At T_{case} = 65°C at T_C point / 10% failure rate

Expected Lifetime

Product name	Lamp group				
QTP-OPTIMAL 1X54...58	DULUX L 55 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	60	70
		Lifetime [h]	100000	100000	70000
	L 58 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	60	70
		Lifetime [h]	100000	100000	80000

Additional product data

Suitable for lamp power (1 lamp)	54...58 W
Predecessor EAN	4008321390158

Capabilities

Suitable for emergency lighting	Yes
Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2
Max. cable length to lamp/LED module	2.0 m / 1.0 m
Dimmable	No
Intended for no-load operation	No

Certificates & standards

Approval marks – approval	EL / VDE / ENEC 10 / VDE-EMC
EEI – Energy Label	A2 BAT
Standards	Acc. to IEC 61347-2-3 / App. J/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to IEC 61000-3-2/Acc. to IEC 61547
Protection class	I
Type of protection	IP20


Logistical data

Commodity code	85041080900
----------------	-------------


Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh)	
Date of Declaration	19-05-2023
Primary Article Identifier	4008321873729
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	ed896186-15f2-4625-841d-e245efea4991


Wiring Diagram

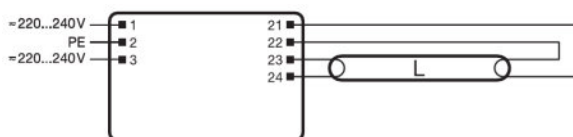

	GTP-OPTIMAL 1x10-80	GTP-OPTIMAL 16x10-88	GTP-OPTIMAL 50x10-88	GTP-OPTIMAL 3x10-88
 VNA 100	17 u	12 u	12 u	8 u
 VNA 100	20 u	18 u	18 u	13 u
 VNA 100	u 24 A	< 37 A	< 37 A	< 37 A
 VNA 100	300 um	200 um	200 um	150 um



Max. permitted cable length between ECG and lamp: 2.0 m (PIN 21, 22); 1.0 m (PIN 23, 24)



Max. permitted cable length between ECG and lamp: 2.8 m (EN 21, 22, 25, 26); 1.8 m (EN 23, 24)

- Макс. Leitungslänge zwischen EVG und Lampe; Leitungslänge max.: Hauptlampe

OSRAM

319638 QTP5 1x..

590771 EAC QTP-OPTIMAL

Additional product information

- In order to achieve good radio interference suppression:1. Keep the cable between ECG and lamp as short as possible.2. The single lamp wires must be routed as close as possible to each other, whereas the lines of the different lamp ends must be routed separately.

[Download Data](#)

Product datasheet

File	
	User instruction QUICKTRONIC QTP OPTIMAL
	Addon Technical Information 502689_Frequent switching Quicktronic
	Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM
	Certificates 592319_EAC certificate for Quicktronics QT
	Certificates 349650_QTP-OPTIMAL VDE Certificate
	Certificates 346505_ENEC QTP-Optimal
	Certificates 346506 EMC QTP-Optimal
	Certificates 346512_CE QTP-Optimal
	Declarations of conformity QUICKTRONIC CE 3364256 060923

Ecodesign regulation information:

- Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321873729	QTP-OPTIMAL 1X54...58	Shipping carton box 20	305 mm x 161 mm x 104 mm	5.11 dm ³	3777.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QTP-OPTIMAL 1X54...58

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 35 °C	Number of lighting outlets
QTP-OPTIMAL 1X54...58	DULUX L 55 W	0.24 A	50.00 W	0.98	4800 lm	1
	HNS 20 4P SE					
	HNS 36 4P SE					
	HO 50 W ES	0.26 A	54.00 W	0.98	4450 lm	1
	HO 54 W	0.26 A	54.00 W	0.98	4450 lm	1
	L 58 W	0.25 A	54.00 W	0.98	5000 lm	1
	NS 55W G13					