

LEDiving CANBUS CONTROL UNIT

LEDiving CANBUS CONTROL UNIT



Bypasses the vehicle's outage detection

Prevents error messages in board computers during failure detection



Removable installation by fixed clips

Faston terminals with fix wire tap connectors



3 years OSRAM guarantee, refer to www.osram.comam-guarantee for precise conditions

For more customer satisfaction



Prevents failure messages

The LEDiving CANBUS CONTROL UNIT serves as a bypass of a vehicle's lamp failure detection system when using a LED retrofit lamp. The control unit offers an easy installation and is suitable for most vehicle models with automatic lamp failure detection system. OSRAM provides a 3 year guarantee for this product.

Technical data


Product information

Order reference	LEDCCU02
Application (Category and Product specific)	Accessories for LED retrofits

Electrical data

Power input	25 W
System wattage	5.00 W
Nominal wattage	21.00 W
Power input tolerance	±20 %

Dimensions & weight

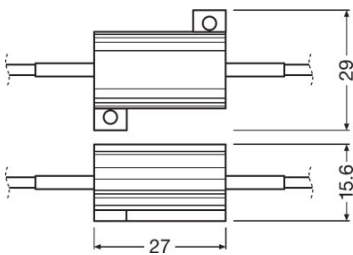

Diameter	16.0 mm
Product weight	23.00 g
Length	18 mm

Lifespan

Lifespan B3	2000 h
Lifespan Tc	2000 h
Guarantee	3 years

Capabilities

Technology	LED accessories ¹⁾
------------	-------------------------------

¹⁾ Accessories for light-emitting diode application

Country specific categorizations

Order reference	LEDCCU02
-----------------	----------

Product datasheet

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	19-04-2024
Declaration No. in SCIP database	In work

Equipment / Accessories


- Connector clips included

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899301993	LED CANBUS CONTROL UNIT CCU02	Folding carton box 2	95 mm x 30 mm x 135 mm	0.38 dm ³	75.00 g
4052899302006	LED CANBUS CONTROL UNIT CCU02	Shipping carton box 20	198 mm x 160 mm x 146 mm	4.63 dm ³	853.00 g
4052899302013	LED CANBUS CONTROL UNIT CCU02	Shipping carton box 160	410 mm x 335 mm x 312 mm	42.85 dm ³	7111.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	User instruction User Manual LEDriving Canbus Control Unit 12V 21W (LEDCBCTRL102)

Safety advice

Application advice:For more detailed application information and graphics please see product datasheet and user manual.

References / Links

Guarantee terms are available at www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

