

## LINEARlight FLEX Tunable White IP00

Linear LED modules for flexible and individualized lighting solutions



### Product family features

- 24 V LED strips flexible and cuttable
- Luminous flux: up to 3,800 lm/m
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

### Product family benefits

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

### Areas of application

- Cove lighting
- Shop lighting
- Offices



Product family datasheet

Technical data

| Product description        | Electrical data |                 |                           |               |                     |                                                   | Photometrical data |
|----------------------------|-----------------|-----------------|---------------------------|---------------|---------------------|---------------------------------------------------|--------------------|
|                            | Nominal voltage | Type of current | Nominal wattage per meter | Rated wattage | Input voltage range | Accidental reverse input voltage protection up to | Light color LED    |
| LF3400TW-G5 -927.965-03 L1 | 240 V           | DC              | 30.9 W                    | 9270 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF3400TW-G5 -927.957-03 L1 | 240 V           | DC              | 30.2 W                    | 9070 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF3400TW-G5 -925.940-03 L1 | 240 V           | DC              | 32.4 W                    | 9730 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF3400TW-G5 -922.935-03 L1 | 240 V           | DC              | 34.7 W                    | 10400 W       | 23...25 V           | 25 V                                              | Dynamic White      |
| LF1100TW-G5 -927.965-09 L2 | 240 V           | DC              | 9.8 W                     | 8840 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF1100TW-G5 -927.957-09 L2 | 240 V           | DC              | 9.8 W                     | 8840 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF1100TW-G5 -925.940-09 L2 | 240 V           | DC              | 10.4 W                    | 9360 W        | 23...25 V           | 25 V                                              | Dynamic White      |
| LF1100TW-G5 -922.935-09 L2 | 240 V           | DC              | 10.9 W                    | 9850 W        | 23...25 V           | 25 V                                              | Dynamic White      |

| Product description        | Color rendering index Ra | Luminous flux per meter | Luminous efficacy | Standard deviation of color matching | Light color (designation) | Dimensions & weight |
|----------------------------|--------------------------|-------------------------|-------------------|--------------------------------------|---------------------------|---------------------|
|                            |                          |                         |                   |                                      |                           | Length              |
| LF3400TW-G5 -927.965-03 L1 | 90                       | 3400 lm                 | 110 lm/W          | ≤3 sdc                               | 2700...6500 K             | 30000 mm            |
| LF3400TW-G5 -927.957-03 L1 | 90                       | 3400 lm                 | 113 lm/W          | ≤3 sdc                               | 2700...5700 K             | 30000 mm            |
| LF3400TW-G5 -925.940-03 L1 | 90                       | 3400 lm                 | 105 lm/W          | ≤3 sdc                               | 2500...4000 K             | 30000 mm            |
| LF3400TW-G5 -922.935-03 L1 | 90                       | 3400 lm                 | 98 lm/W           | ≤3 sdc                               |                           | 30000 mm            |
| LF1100TW-G5 -927.965-09 L2 | 90                       | 1156 lm                 | 118 lm/W          | ≤3 sdc                               | 2700...6500 K             | 90000 mm            |
| LF1100TW-G5 -927.957-09 L2 | 90                       | 1156 lm                 | 118 lm/W          | ≤3 sdc                               | 2700...5700 K             | 90000 mm            |
| LF1100TW-G5 -925.940-09 L2 | 90                       | 1156 lm                 | 111 lm/W          | ≤3 sdc                               | 2500...4000 K             | 90000 mm            |
| LF1100TW-G5 -922.935-09 L2 | 90                       | 1111 lm                 | 102 lm/W          | ≤3 sdc                               |                           | 90000 mm            |

| Product description        | Cable length | Product weight | Temperatures & operating conditions        |                              | Additional product data      |
|----------------------------|--------------|----------------|--------------------------------------------|------------------------------|------------------------------|
|                            |              |                | Temperature range in operation at Tc point | Temperature range at storage | ID of contained light source |
| LF3400TW-G5 -927.965-03 L1 | 5000         | 3500 g         | -20...+85 °C <sup>1)</sup>                 | -40...+85 °C                 | LS_TRV_286287                |
| LF3400TW-G5 -927.957-03 L1 | 5000         | 3500 g         | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286066                |
| LF3400TW-G5 -925.940-03 L1 | 5000         | 3500 g         | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286065                |

## Product family datasheet

| Product description        | Cable length | Product weight | Temperatures & operating conditions        |                              | Additional product data      |
|----------------------------|--------------|----------------|--------------------------------------------|------------------------------|------------------------------|
|                            |              |                | Temperature range in operation at Tc point | Temperature range at storage | ID of contained light source |
| LF3400TW-G5 -922.935-03 L1 | 5000         | 3500 g         | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286064                |
| LF1100TW-G5 -927.965-09 L2 | 5000         | 10400 g        | -20...+85 °C <sup>1)</sup>                 | -40...+85 °C                 | LS_TRV_286286                |
| LF1100TW-G5 -927.957-09 L2 | 5000         | 10400 g        | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286063                |
| LF1100TW-G5 -925.940-09 L2 | 5000         | 10400 g        | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286062                |
| LF1100TW-G5 -922.935-09 L2 | 5000         | 10400 g        | -20...+85 °C <sup>1)</sup>                 | -40...85 °C                  | LS_TRV_286061                |

| Product description        | Predecessor EAN                 | Capabilities | Certificates & standards                              |             |
|----------------------------|---------------------------------|--------------|-------------------------------------------------------|-------------|
|                            |                                 | Dimmable     | Energy efficiency class of the contained light source | Standards   |
| LF3400TW-G5 -927.965-03 L1 |                                 | Yes          | F                                                     |             |
| LF3400TW-G5 -927.957-03 L1 | 4062172032605,<br>4062172032629 |              | F                                                     | CE/ENEC/EAC |
| LF3400TW-G5 -925.940-03 L1 |                                 |              | F                                                     | CE/ENEC/EAC |
| LF3400TW-G5 -922.935-03 L1 | 4052899563339                   |              | F                                                     | CE/ENEC/EAC |
| LF1100TW-G5 -927.965-09 L2 |                                 | Yes          | F                                                     |             |
| LF1100TW-G5 -927.957-09 L2 | 4062172032667,<br>4062172032643 |              | F                                                     | CE/ENEC/EAC |
| LF1100TW-G5 -925.940-09 L2 |                                 |              | F                                                     | CE/ENEC/EAC |
| LF1100TW-G5 -922.935-09 L2 |                                 |              | F                                                     | CE/ENEC/EAC |

| Product description        | Logistical data | Environmental information<br>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                            |                            |
|----------------------------|-----------------|----------------------------------------------------------------------------------------------------|----------------------------|----------------------------|
|                            | Commodity code  | Date of Declaration                                                                                | Primary Article Identifier | Candidate List Substance 1 |
| LF3400TW-G5 -927.965-03 L1 | 85395100000     | 26-05-2023                                                                                         | 4062172263719              | Lead                       |
| LF3400TW-G5 -927.957-03 L1 | 85395100000     | 09-06-2023                                                                                         | 4062172189354              | Lead                       |
| LF3400TW-G5 -925.940-03 L1 | 85395100000     | 09-06-2023                                                                                         | 4062172189330              | Lead                       |
| LF3400TW-G5 -922.935-03 L1 | 85395100000     | 09-06-2023                                                                                         | 4062172189316              | Lead                       |
| LF1100TW-G5 -927.965-09 L2 | 85395100000     | 19-05-2023                                                                                         | 4062172263696              | Lead                       |
| LF1100TW-G5 -927.957-09 L2 | 85395100000     | 09-06-2023                                                                                         | 4062172189293              | Lead                       |
| LF1100TW-G5 -925.940-09 L2 | 85395100000     | 09-06-2023                                                                                         | 4062172189279              | Lead                       |
| LF1100TW-G5 -922.935-09 L2 | 85395100000     | 09-06-2023                                                                                         | 4062172189255              | Lead                       |


| Product description        | CAS No. of substance 1 | Safe Use Instruction                                                                               | Declaration No. in SCIP database     |
|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------|
| LF3400TW-G5 -927.965-03 L1 | 7439-92-1              | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 3d44363c-fe56-4bbd-97a6-860743cbd9c5 |

## Product family datasheet


| Product description        | CAS No. of substance<br>1 | Safe Use Instruction                                                                               | Declaration No. in<br>SCIP database  |
|----------------------------|---------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------|
| LF3400TW-G5 -927.957-03 L1 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 6dfc036b-ceb0-4e6b-9095-48384a422e91 |
| LF3400TW-G5 -925.940-03 L1 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 3b0dc5f1-547b-441b-bd5e-9960b615b212 |
| LF3400TW-G5 -922.935-03 L1 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 9c2d531d-dbbb-487a-b4d4-50328cc7dc74 |
| LF1100TW-G5 -927.965-09 L2 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | d751d4ed-f883-4c1c-834c-4e9ef2896222 |
| LF1100TW-G5 -927.957-09 L2 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 1e4aef2d-5fd2-4940-9779-142c985ead14 |
| LF1100TW-G5 -925.940-09 L2 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 39d314f8-b6f9-41f5-acad-622e0887ed2a |
| LF1100TW-G5 -922.935-09 L2 | 7439-92-1                 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 103ac832-f72b-4c34-b09f-89e3b075d569 |

<sup>1)</sup> Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

## Product family datasheet

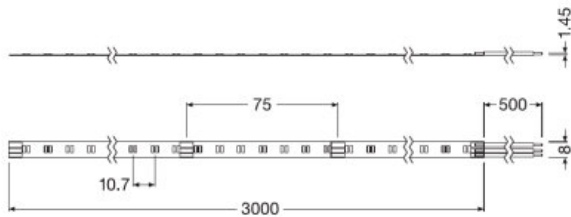

LINEARlight Flex Tunable White IP00 L1 drawing

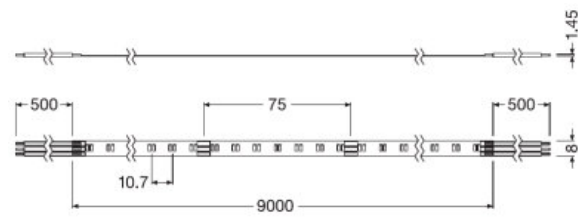

LINEARlight Flex Tunable White IP00 L2

### Equipment / Accessories

- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Simplified connection with optional matching CONNECTsystem
- Perfectly matched with OPTOTRONIC OTi DALI 50/220...240/24 TW
- Perfectly matched with OPTOTRONIC OTi DALI 80/220...240/24 TW

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Additional product information

- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H<sub>2</sub>S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H<sub>2</sub>S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H<sub>2</sub>S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T<sub>c</sub>-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T<sub>c</sub>-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

---

### Sales and Technical Support

## Product family datasheet

Sales and Technical Support [www.osram.com](http://www.osram.com)

### Download Data

| File                                                                                |                                                                                    |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|    | User instruction<br>LINEARlight FLEX, Tunable White                                |
|    | Product Datasheet<br>LINEARlight Flex Tunable White CRI90 Specification Sheet (EN) |
|    | Brochures<br>Light is freedom of design (EN)                                       |
|    | Certificates<br>VDE ENEC CERTIFICATE 40052516 160823                               |
|    | Certificates<br>LF(P) TW G5 CB 180121                                              |
|    | Declarations of conformity<br>LR FLEX TW2 CE 4249165 02 020823                     |
|   | Eulumdat<br>LF3400TW-G5-927.957-03 L1 LTD 130421                                   |
|  | IES data<br>LF3400TW-G5-927.957-03 L1 IES 130421                                   |
|  | Eulumdat<br>LF3400TW-G5-925.940-03 L1 LTD 130421                                   |
|  | IES data<br>LF3400TW-G5-925.940-03 L1 IES 130421                                   |
|  | Eulumdat<br>LF3400TW-G5-922.935-03 L1 LTD 130421                                   |
|  | IES data<br>LF3400TW-G5-922.935-03 L1 IES 130421                                   |
|  | Eulumdat<br>LF1100TW-G5-927.957-09 L2 LTD 130421                                   |
|  | IES data<br>LF1100TW-G5-927.957-09 L2 IES 130421                                   |
|  | Eulumdat<br>LF1100TW-G5-925.940-09 L2 LTD 130421                                   |
|  | IES data<br>LF1100TW-G5-925.940-09 L2 IES 130421                                   |
|  | Eulumdat<br>LF1100TW-G5-922.935-09 L2 LTD 130421                                   |
|  | IES data<br>LF1100TW-G5-922.935-09 L2 IES 130421                                   |

## Product family datasheet

### Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistical Data

| Product code  | Product description        | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume               | Gross weight |
|---------------|----------------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4062172263719 | LF3400TW-G5 -927.965-03 L1 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1213.00 g    |
| 4062172189354 | LF3400TW-G5 -927.957-03 L1 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1213.00 g    |
| 4062172189330 | LF3400TW-G5 -925.940-03 L1 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1213.00 g    |
| 4062172189316 | LF3400TW-G5 -922.935-03 L1 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1213.00 g    |
| 4062172263696 | LF1100TW-G5 -927.965-09 L2 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1765.00 g    |
| 4062172189293 | LF1100TW-G5 -927.957-09 L2 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1765.00 g    |
| 4062172189279 | LF1100TW-G5 -925.940-09 L2 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1765.00 g    |
| 4062172189255 | LF1100TW-G5 -922.935-09 L2 | Shipping carton box 8        | 241 mm x 195 mm x 205 mm             | 9.63 dm <sup>3</sup> | 1765.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Accessories Optional

## Product family datasheet

| Product description        | Accessory name                | Accessory code  |
|----------------------------|-------------------------------|-----------------|
| LF3400TW-G5 -927.965-03 L1 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF3400TW-G5 -927.965-03 L1 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF3400TW-G5 -927.965-03 L1 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF3400TW-G5 -927.965-03 L1 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF3400TW-G5 -927.965-03 L1 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF3400TW-G5 -927.965-03 L1 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF3400TW-G5 -927.965-03 L1 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF3400TW-G5 -927.965-03 L1 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF3400TW-G5 -927.965-03 L1 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF3400TW-G5 -927.957-03 L1 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF3400TW-G5 -927.957-03 L1 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF3400TW-G5 -927.957-03 L1 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF3400TW-G5 -927.957-03 L1 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF3400TW-G5 -927.957-03 L1 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF3400TW-G5 -927.957-03 L1 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF3400TW-G5 -927.957-03 L1 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF3400TW-G5 -927.957-03 L1 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF3400TW-G5 -927.957-03 L1 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF3400TW-G5 -925.940-03 L1 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF3400TW-G5 -925.940-03 L1 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF3400TW-G5 -925.940-03 L1 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF3400TW-G5 -925.940-03 L1 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF3400TW-G5 -925.940-03 L1 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF3400TW-G5 -925.940-03 L1 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF3400TW-G5 -925.940-03 L1 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF3400TW-G5 -925.940-03 L1 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF3400TW-G5 -925.940-03 L1 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF3400TW-G5 -922.935-03 L1 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF3400TW-G5 -922.935-03 L1 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF3400TW-G5 -922.935-03 L1 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF3400TW-G5 -922.935-03 L1 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF3400TW-G5 -922.935-03 L1 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF3400TW-G5 -922.935-03 L1 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF3400TW-G5 -922.935-03 L1 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF3400TW-G5 -922.935-03 L1 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF3400TW-G5 -922.935-03 L1 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF1100TW-G5 -927.965-09 L2 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |

## Product family datasheet

|                            |                               |                 |
|----------------------------|-------------------------------|-----------------|
| LF1100TW-G5 -927.965-09 L2 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF1100TW-G5 -927.965-09 L2 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF1100TW-G5 -927.965-09 L2 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF1100TW-G5 -927.965-09 L2 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF1100TW-G5 -927.965-09 L2 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF1100TW-G5 -927.965-09 L2 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF1100TW-G5 -927.965-09 L2 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF1100TW-G5 -927.965-09 L2 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF1100TW-G5 -927.957-09 L2 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF1100TW-G5 -927.957-09 L2 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF1100TW-G5 -927.957-09 L2 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF1100TW-G5 -927.957-09 L2 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF1100TW-G5 -927.957-09 L2 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF1100TW-G5 -927.957-09 L2 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF1100TW-G5 -927.957-09 L2 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF1100TW-G5 -927.957-09 L2 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF1100TW-G5 -927.957-09 L2 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF1100TW-G5 -925.940-09 L2 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF1100TW-G5 -925.940-09 L2 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF1100TW-G5 -925.940-09 L2 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF1100TW-G5 -925.940-09 L2 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF1100TW-G5 -925.940-09 L2 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF1100TW-G5 -925.940-09 L2 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF1100TW-G5 -925.940-09 L2 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF1100TW-G5 -925.940-09 L2 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF1100TW-G5 -925.940-09 L2 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |
| LF1100TW-G5 -922.935-09 L2 | CORNER-FLEX -4P-003 KIT 10PCS | ▶ 4062172179638 |
| LF1100TW-G5 -922.935-09 L2 | CORNER-FLEX -4P-015 KIT 10PCS | ▶ 4062172179676 |
| LF1100TW-G5 -922.935-09 L2 | CONN-FLEX -3P-050 KIT 10PCS   | ▶ 4062172179690 |
| LF1100TW-G5 -922.935-09 L2 | CONN-FLEX -3P-200 KIT 10PCS   | ▶ 4062172179720 |
| LF1100TW-G5 -922.935-09 L2 | LTS-SLIMTRACK -2000 KIT 5 PCS | ▶ 4062172207300 |
| LF1100TW-G5 -922.935-09 L2 | FX-QMS-G1 -TU15H6W3-300       | ▶ 4052899448889 |
| LF1100TW-G5 -922.935-09 L2 | FX-QMS-G1 -TU16H12W3-300      | ▶ 4052899448988 |
| LF1100TW-G5 -922.935-09 L2 | FX-QMS-G1 -TU16H12-300        | ▶ 4052899448964 |
| LF1100TW-G5 -922.935-09 L2 | FX -SC08-G2-CT4PJ             | ▶ 4052899464858 |

---

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.