


Lightbar SX180-SP

Improved safety on-road and off-road with the full force of LEDs



Compact housing design

Compact mounting dimensions enables a wide range of possible applications



Lighting distance up to 190 meters

Increased far field illumination



Spot Beam

Highly concentrated light beam

Product datasheet



Durable and robust LED auxiliary light with certified approval for use on roads

Bright light is particularly critical on unlit streets and dirt roads. It lets drivers identify obstacles on the road far in advance. With its six high-performance LEDs, the LEDriving Lightbar SX180-SP automotive auxiliary light gives drivers better visibility and improved safety on the road. And the LED auxiliary light also impresses at shorter distances. With an illuminance of one lux and a beam angle of eight degrees, the beam of light can reach up to 190 meters. That's sufficient enough to identify obstacles on the road far in advance. The sophisticated reflector design of the LED search light provides very high optical efficiency with uniform light distribution and reduced glare. Reduced glare is especially relevant for oncoming traffic and counts as another important aspect of road safety. Beyond its light output, the LED high beam enhances the off-road style of the vehicle. Because the LED auxiliary light with certified approval is intended for roads, its use is not limited to off-road terrain. Various mounting options & durability it goes without saying that the LED auxiliary light has to withstand quite a bit when used almost daily. Its hard-wearing polycarbonate lens allows it to meet even the toughest demands while extending the lifespan of the auxiliary light for automobiles. An integrated driver and thermal management system prevents possible damage from overheating. Over and under voltage protection automatically breaks the circuit when power exceeds the predetermined current for a specified amount of time. Even major temperature fluctuations aren't a problem for the LEDriving Lightbar SX180-SP LED auxiliary lights. They work whether the air temperature is a very cold -30 or a hot 60 degrees Celsius. This is a very helpful feature, particularly during off-road tours. Its compact mounting dimensions allow the LED working light to be mounted in a variety of ways. The LED auxiliary light can be easily installed even on the front end of 4x4 and off-road vehicles as well as utility and industrial vehicles.

Product datasheet

Technical data

Product information

Application (Category and Product specific)	Additional high beam application
---	----------------------------------

General Product Information

Global order reference	LEDDL105-SP
------------------------	-------------


Electrical Data

Nominal wattage	14 W
Test voltage	13.5 V

Photometric Data

Nominal luminous flux	1300 lm
Color temperature	6000 K
Light distance at 1lx	190 m

Physical Attributes & Dimensions

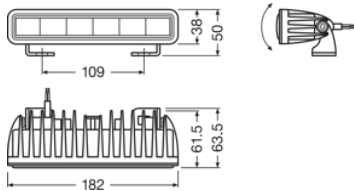

Product weight	440.00 g
Length	182.0 mm
Width	62.0 mm
Height	38.0 mm

Lifetime Data

Lifespan Tc	5000 hr
Guarantee	5 years

Additional product data

Connector to lamp	DT Connector
-------------------	--------------

Product datasheet

Capabilities

Technology	LED
------------	-----

Certificates & standards

Approval marks – approval	E4 approval
Type of protection	IP69K
Standards	ECE R10, R112

Logistical data

Commodity code	851220009000
----------------	--------------

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of declaration	21-10-2024
Primary article identifier	4052899595415
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	a1bdcbc4-aa38-44ed-b994-4a48e9654415



ref_pim_amsprodinfographic
s

Logistical Data













Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

Product datasheet

4052899595415	Lightbar SX180-SP	Folding carton box 1	283 mm x 137 mm x 89 mm	3.45 dm ³	626.00 g
4052899595422	Lightbar SX180-SP	Shipping carton box 8	371 mm x 304 mm x 307 mm	34.62 dm ³	5523.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	User instruction LEDriving
	Movie application LEDriving D and W Image Video Bringing light to life (EN)
	Movie application Working and Driving Lights Amarok Winter
	Movie application LEDriving Driving and Working Lights Reference Video (EN)
	Movie application OSRAM LEDdriving and working lights Imagefilm (EN)
	Movie application LEDriving driving & working lights in application (EN)
	Movie application OSRAM Quality Testing LEDriving working and driving lights (EN)
	Video Light is Quality -OSRAM LEDriving Driving and Working Lights Quality Tests (EN)
	Video OSRAM LEDriving driving and working lights: The night doesn't stand a chance
	Video OSRAM LEDriving driving and working lights in action - From on road to off road applications (EN)
	Video Reference Number made easy - Making sure your LEDriving Driving Lights are legal on public roads
	ref_pim_amsproduct360degreeimages LEDriving Lightbar LEDDL105-SP

Legal advice

In vehicles with 12/24 volts, auxiliary lights must be installed in pairs
Precise terms and conditions at:
www.osram.com/guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Product datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

