

Cube VX80-SP



Spot Beam

Designed for far field illumination. For a focused illumination in the far field of the vehicle.




Up to 114 m long beam

See and be seen with OSRAM



Working Light Application

Versatile applicable and flexible in use. Off-road, in terrain, at work and in the spare time.



Slim design

Slim design for a discreet appearance when mounted on the vehicle



Bringing light to life with OSRAM LEDriving driving and working lights

Considerable illumination on dark field- and forest paths, off-road and off the beaten tracks, this can be achieved with the OSRAM LEDriving Cube VX80-SP. With its 4 powerful, high-performance long-life LEDs, the OSRAM LEDriving Cube VX80-SP has a range of up to 114 meters and thus offers the operator impressive visibility at the workplace and in terrain. Even in dim light and reduced visibility due to external environmental influences, the OSRAM LEDriving Cube VX80-SP with up to 6000 Kelvin can provide conditions similar to daylight. The power package with up to 1300 lumens of luminosity scores with highest optical efficiency and homogeneous light distribution. This results in the possibility of an improved visibility for you and an improved visibility of your working environment, consequently also an increased safety. The OSRAM LEDriving Cube VX80-SP impresses with its powerful performance and a long service life with up to 5000 hours. Versatile applicable, it defies numerous environmental influences and, thanks to high-quality materials such as the aluminum housing and the stable polycarbonate lens, it is particularly light and at the same time robust and resistant. The OSRAM LEDriving Cube VX80-SP has been tested and validated with the IP-Protection Class IP67 in our DIN certified environmental simulation laboratory for extreme external influences regarding water, dust, impacts, heat, cold and permanent vibration. The integrated driver and the thermal management system regulate the temperature of the LED Spotlight and can thus prevent damage from overheating. The polarity protection inhibits the wrong polarity of the voltage supply and can thus prevent possible damage by automatically switching off the LEDs. The OSRAM LEDriving Cube VX80-SP is an effective and efficient addition to your vehicle. The OSRAM LEDriving Cube VX80-SP can be attached to cars, trucks, agricultural machinery, farm machinery, commercial vehicles, construction vehicles, off-road vehicles and quads²). The OSRAM LEDriving Cube VX80-SP is versatile applicable and flexible in use.²) Auxiliary work lights without ECE approval to be used as working lights and are approved for use on any vehicle in accordance with StVZO §52 (7). However, they may not be switched on and used while driving.

Product datasheet

Technical data

Product information

Application (Category and Product specific)	Additional high beam application
---	----------------------------------

General Product Information

Product remark	Beam Pattern: Spot
Global order reference	LEDWL101-SP


Electrical Data

Nominal voltage	12/24 V
Nominal wattage	20 W
Test voltage	13.2 V

Photometric Data

Nominal luminous flux	1300 lm
Color temperature	6000 K
Light distance at 1lx	114 m

Physical Attributes & Dimensions

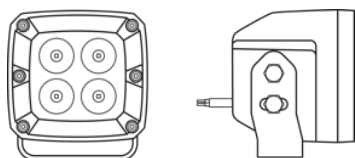

Product weight	1090.00 g
Length	314.5 mm
Width	271.5 mm
Height	70.0 mm

LED module information

Number of LEDs per module	4
---------------------------	---

Lifetime Data

Product datasheet

Lifespan Tc	5000 hr
Guarantee	2 years

Additional product data

Connector to lamp	Open wire
-------------------	-----------

Capabilities

Technology	LED ¹⁾
------------	-------------------

¹⁾ Light-emitting diode application

Certificates & standards

Approval marks – approval	E4 approval
Type of protection	IP67
Standards	ECE R10

Logistical data

Commodity code	85122000900
----------------	-------------

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	da99be55-f2a7-4897-aba9-94dfb3d43128











Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172141970	Cube VX80-SP	Folding carton box 2	217 mm x 97 mm x 115 mm	2.42 dm ³	2277.00 g
4062172141987	Cube VX80-SP	Shipping carton box 16	412 mm x 242 mm x 144 mm	14.36 dm ³	18436.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

Product datasheet

File	
	User instruction LEDriving Cube WL VX80-SP
	Movie application LEDriving D and W Image Video Bringing light to life (EN)
	Movie application Working and Driving Lights Amarok Winter
	Movie application LEDriving Driving and Working Lights Reference Video (EN)
	Movie application OSRAM LEDdriving and working lights Imagefilm (EN)
	Movie application OSRAM Quality Testing LEDriving working and driving lights (EN)
	Video Light is Quality -OSRAM LEDriving Driving and Working Lights Quality Tests (EN)
	Video OSRAM LEDriving driving and working lights: The night doesn't stand a chance
	Video OSRAM LEDriving driving and working lights in action - From on road to off road applications (EN)
	ref_pim_amsproduct360degreeimages LEDriving Cube VX80-SP LEDWL101-SP

Legal advice

Legal advice:

1) Precise terms and conditions at: www.osram.com/am-guarantee 2) Auxiliary work lights without ECE approval to be used as working lights and are approved for use on any vehicle in accordance with StVZO §52 (7). However, they may not be switched on and used while driving.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM