


## ELEMENT G4

Constant Current Compact – Non dimmable

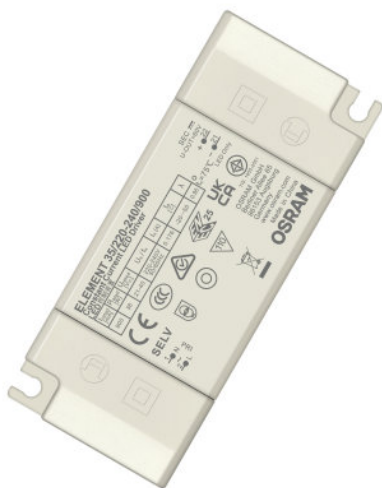

### Product family features

- Supply voltage: 220...240 V
- Fixed output (no dimming)
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- SELV

### Product family benefits

- Versatile scope of application due to output power range of up to 42 W
- Safety ensured by OSRAM (SELV)
- Higher quality of light thanks to < 5% output ripple current
- High efficiency
- High compatibility with COBs and discrete LEDS

### Areas of application

- Spot light and down light
- Panels
- Other Indoor LED luminaries
- Suitable for downlights, spotlights and LED panels
- Suitable for indoor SELV installations

## Product family datasheet

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Sales and Technical Support

Sales and Technical Support [www.osram.com](http://www.osram.com)

---

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.