


# ORIGINAL - S8 WEDGE BASE PY27/7W

## Original spare part

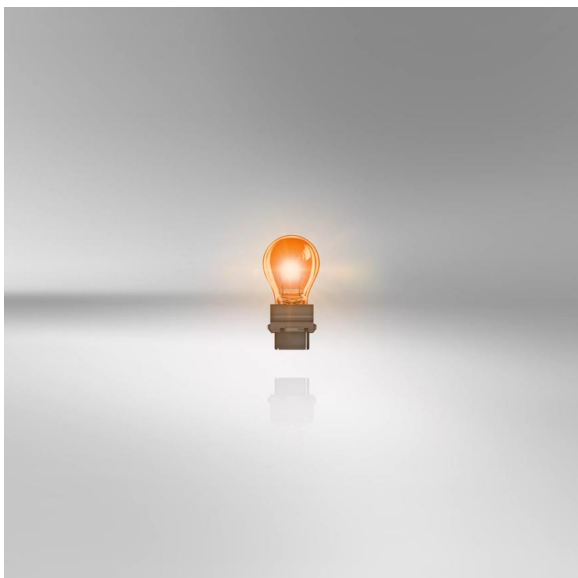

### The cost-effective original spare parts

ORIGINAL signal lamps with plastic bases offer reliable OEM quality. The original spare parts are available for different applications.

# Product datasheet

## Technical data

### Product information

Application (Category and Product specific)	Auxiliary lamp
---	----------------


### General Product Information

Global order reference	3757AK
------------------------	--------

### Electrical Data

Nominal voltage	12.8 V
Nominal wattage	27/7 W
Test voltage	13.5 V

### Physical Attributes & Dimensions



Diameter	26.5 mm
Product weight	7.26 g
Length	53.3 mm
Lamp base	-

### Lifetime Data

Lifespan B3	460 hr
Lifespan Tc	1100 hr

### Capabilities

Technology	AUX <sup>1)</sup>
------------	-------------------

<sup>1)</sup> Auxiliary signal lamp

### Certificates & standards

ECE category	PY27/7W
--------------	---------

## Product datasheet

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4052899178731
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899178731	S8 WEDGE BASE PY27/7W	Unpacked 1	52 mm x 25 mm x 25 mm	0.03 dm <sup>3</sup>	8.00 g
4052899178755	S8 WEDGE BASE PY27/7W	Shipping carton box 50	181 mm x 154 mm x 90 mm	2.51 dm <sup>3</sup>	524.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



# OSRAM