


PrevaLED Flat AC MA

Spot-, Down- and Wallmount Light Engines and Modules

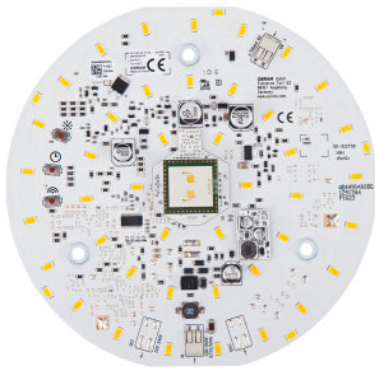

Areas of application

- Corridors
- Stairways
- Landings
- Hallways

Product family benefits

- Touch protection accessory for simple use in luminaires
- High reliability
- Easy to use
- Optimised design for simple thermal management
- Enables thin and efficient luminaire designs
- High quality of light thanks to low modulation
- 5 year guarantee

Product family features

- Master with integrated RF sensor (motion, dimming, auto off at daylight)
- Master Slave system with up to 11 luminaires and up to 5 Masters
- Designed for wall and ceiling luminaires with diffuse light distribution
- Low-cost LED replacement of CFL wall-, and ceiling luminaires
- Driver integrated on LED board
- Available diameter: 170 mm, 240 mm
- Available with color temperature: 3,000 K or 4,000 K
- Available with luminous flux: 1,500 lm, 2,500 lm
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1

Product family datasheet

Application advice

For more detailed application information and graphics please see product datasheet.

Additional product information

- Installation by qualified electrician only.
 - Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
 - Complies with IEC/EN 62031
 - Complies with IEC/EN 61547
 - Complies with IEC/EN 61000-3-2/3
 - Complies with EN 55015, CISPR 15
 - Complies with IEC/EN 62717
 - Complies with EN 300440-1/-2
 - Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
 - Pay attention to polarity! Wrong polarity can cause destruction or malfunction of the module.
 - Conducting paths on the circuit board must not be damaged or destroyed during installation.
 - The LED module itself and all its components must not be stressed mechanically.
 - For optimal cooling a thermal interface material should be applied between LED module and heat sink.
 - The module must not be attached to wood or other flammable materials.
 - Protect against splashes!
 - The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
 - The product implemented control components are not designed for removal.
-

Sales and Technical Support

Sales and Technical Support www.osram.com

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit <https://>

- ▶ www.inventronics-light.com/multilevel-guarantees
-

Product family datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.