


## PL-FLAT-AC PC-G3 3300-830

PrevaLED Flat AC PC | Spot-, Down- and Wallmount Light Engines and Modules

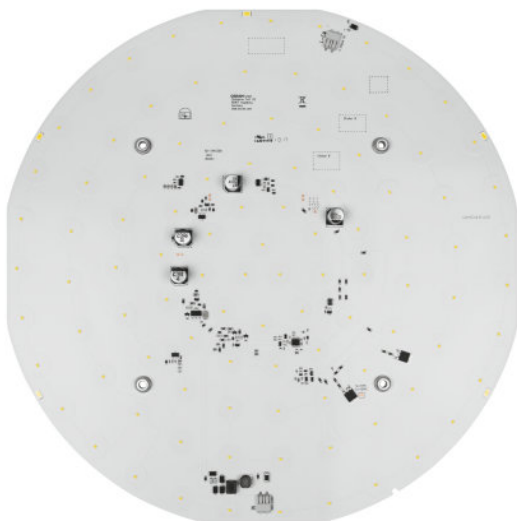

### Product family features

- Dimmable (with suitable Phase-cut dimmers)
- Designed for wall and ceiling luminaires with diffuse light distribution
- Low-cost LED replacement of CFL wall-, and ceiling luminaires
- Driver integrated on LED board
- Available diameter: 170 mm, 240 mm
- Available with color temperature: 3,000 K or 4,000 K
- Available with luminous flux: 1,500 lm, 2,500 lm, 3,300 lm
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1

### Product family benefits

- Touch protection accessory for simple use in luminaires
- High reliability
- Easy to use
- Optimised design for simple thermal management
- Enables thin and efficient luminaire designs
- High quality of light thanks to low modulation
- 5 year guarantee

### Areas of application

- Corridors
- Stairways
- Landings
- Hallways



Technical data

Electrical data

Nominal voltage	230 V
Input voltage range	220...240 V
Type of current	AC
Inrush current	0,78 A <sup>1)</sup>
Max. ECG no. on circuit breaker 10 A (B)	72
Max. ECG no. on circuit breaker 16 A (B)	115
Input voltage AC	220...240 V
Mains frequency	0/50/60 Hz
Output PSTLM	≤1
Output SVM	≤0.9
On-mode power	24.50 W
Energy consumption in on-mode	24.5 kWh/1000h
Displacement factor (cos φ1)	0.98

<sup>1)</sup> At 10 µs


Photometrical data

Luminous efficacy	134 lm/W
Color rendering index Ra	80
Light color (designation)	Warm White
Correlated color temperature CCT	3000 K
Colour consistency (McAdam ellipses)	3
Useful luminous flux (Φuse)	3300 lm

Light technical data

Starting time	< 05 s
Warm-up time (60 %)	< 200 s
Beam angle	0 °

Dimensions & weight



Diameter	3350 mm
Product weight	29000 g
Height	14.6 mm
Length	335.0 mm
Width	335.0 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	75 °C
Maximum temperature at tc test point	90 °C
Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...85 °C

Lifespan

Number of switching cycles	100000
Lumen maintenance factor LMF	96
L70B50 lifetime	50000 h

Additional product data

Lighting technology used	LED
Predecessor EAN	4052899511965

Capabilities

Dimming range	1...100 %
Dimming interface	Phase Cut
Dimmable	Only with specific dimmers

Certificates & standards

Product datasheet

Standards	CE/ENEC/UKCA/VDE
Type of protection	IP20
Energy efficiency class	E

Logistical data

Commodity code	85395100000
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	25-10-2023
Primary Article Identifier	4062172212175
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	7c42bef8-9a84-4e72-a66c-a41b52b3e553




664174\_5 Year OSRAM  
Guarantee (LED)

Additional product information

- The product implemented control components are not designed for removal.

Download Data

File	
	User instruction PrevaLED Flat AC PC G3

# Product datasheet

	Certificates PL FLAT AC G3 VDE ENEC 40040688 250723
---	--

## Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172212175	PL-FLAT-AC PC-G3 3300-830	Shipping carton box 20	788 mm x 332 mm x 398 mm	104.12 dm <sup>3</sup>	6800.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.