


PL-FLAT-AC PC-G3 4000-830

PrevaLED Flat AC PC | Spot-, Down- and Wallmount Light Engines and Modules

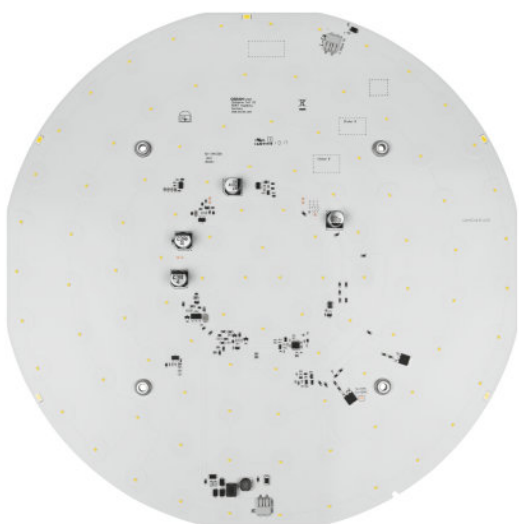

Product family features

- Dimmable (with suitable Phase-cut dimmers)
- Designed for wall and ceiling luminaires with diffuse light distribution
- Low-cost LED replacement of CFL wall-, and ceiling luminaires
- Driver integrated on LED board
- Available diameter: 170 mm, 240 mm
- Available with color temperature: 3,000 K or 4,000 K
- Available with luminous flux: 1,500 lm, 2,500 lm, 3,300 lm
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1

Product family benefits

- Touch protection accessory for simple use in luminaires
- High reliability
- Easy to use
- Optimised design for simple thermal management
- Enables thin and efficient luminaire designs
- High quality of light thanks to low modulation
- 5 year guarantee

Areas of application

- Corridors
- Stairways
- Landings
- Hallways



Technical data

Electrical data

Nominal voltage	230 V
Input voltage range	220...240 V
Type of current	AC
Inrush current	1,80 A ¹⁾
Max. ECG no. on circuit breaker 10 A (B)	60
Max. ECG no. on circuit breaker 16 A (B)	95
Input voltage AC	220...240 V
Mains frequency	0/50/60 Hz
Output PSTLM	≤1
Output SVM	≤0.9
On-mode power	29.50 W
Energy consumption in on-mode	29.5 kWh/1000h
Displacement factor (cos φ1)	0.98

¹⁾ At 10 µs


Photometrical data

Luminous efficacy	135 lm/W
Color rendering index Ra	80
Light color (designation)	Warm White
Correlated color temperature CCT	3000 K
Colour consistency (McAdam ellipses)	3
Useful luminous flux (Φuse)	4000 lm

Light technical data

Starting time	< 05 s
Warm-up time (60 %)	< 200 s
Beam angle	0 °

Dimensions & weight



Diameter	4150 mm
Product weight	43500 g
Height	12.6 mm
Length	415.0 mm
Width	415.0 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	75 °C
Maximum temperature at tc test point	90 °C
Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...85 °C

Lifespan

Number of switching cycles	100000
Lumen maintenance factor LMF	96
L70B50 lifetime	50000 h

Additional product data

Lighting technology used	LED
Predecessor EAN	4052899389014

Capabilities

Dimming range	1...100 %
Dimming interface	Phase Cut
Dimmable	Yes

Certificates & standards

Product datasheet

Standards	CE/ENEC/UKCA/VDE
Type of protection	IP20
Energy efficiency class	D

Logistical data

Commodity code	85395100000
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	25-10-2023
Primary Article Identifier	4062172212397
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	aec59906-1b72-46fd-946c-4e178cfaf56b




664174_5 Year OSRAM
Guarantee (LED)

Additional product information

- The product implemented control components are not designed for removal.

Download Data

File	
	User instruction PrevaLED Flat AC PC G3

Product datasheet

	Certificates PL FLAT AC G3 VDE ENEC 40040688 250723
---	--

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172212397	PL-FLAT-AC PC-G3 4000-830	Shipping carton box 20	505 mm x 452 mm x 458 mm	104.54 dm ³	10079.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
PL-FLAT-AC PC-G3 4000-830	PL-FLTP 415 G2	▶ 4052899968479

References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.