

## PL-BAR-G3 3000-830 280X55

PrevaLED Bar G3 | Area and Bar Light Engines



### Product family features

- Module efficacy: up to 171 lm/W
- Average lifetime (L80 B10): 50,000 h (temperature at  $T_c = 55^\circ\text{C}$ )
- Available module length: 1 ft/280 mm or 2 ft/560mm
- Available with luminous flux: 1,156 lm, 2,312 lm and 3,572 lm
- Available with color temperature: 3,000 K, 4,000 K
- High initial color consistency:  $\leq 3$  SDCM
- CE marked

### Product family benefits

- 3-row LED module suitable for 3 x 11 optics
- Cut out area for shadow-free wiring
- Push-in connector for automated wiring

### Areas of application

- Retail
- Supermarkets
- Industry



Technical data

Electrical data

Nominal voltage	333 V
Nominal current	07 A
Type of current	DC

Photometrical data

Luminous efficacy	145 lm/W
Color rendering index Ra	80


Light technical data

Starting time	< 01 s
Warm-up time (60 %)	< 200 s

LED module information

Number of LEDs per module	33
---------------------------	----

Dimensions & weight

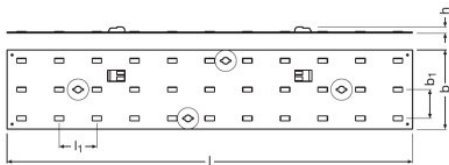

Product weight	5030 g
Length	2800 mm
Width	550 mm
Height	500 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	55 °C
Temperature range in operation at Tc point	-20...75 °C
Maximum temperature at tc test point	75 °C
Temperature range at storage	-30...85 °C

Product datasheet

Lifespan

Number of switching cycles	100000
----------------------------	--------

Certificates & standards

Standards	CE/ENEC
-----------	---------

Logistical data

Commodity code	85414100000
----------------	-------------



Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4052899999459
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained



484525\_5 Year Osram Guarante  
(GB)

Download Data

File	
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL BAR G3 CE 3713512 160623

# Product datasheet

## Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899999459	PL-BAR-G3 3000-830 280X55	Shipping carton box 60	300 mm x 306 mm x 225 mm	20.66 dm <sup>3</sup>	3288.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.