

# Wire Harness AX 2LS




### Connection of two light sources

Wire harness suitable for the installation of two light sources with one lighting function of the OSRAM LEDriving driving and working lights for 12 V vehicles



### OnOff switch integrated

For installation in the vehicles cabin to switch the OSRAM LEDriving working lights on or off as required



### Easy Installation

For easy installation of OSRAM LEDriving driving and working lights



### Bringing light to life with OSRAM LEDriving driving and working lights

To support the installation of the OSRAM LEDriving driving and working lights, OSRAM has developed a special series with suitable accessories for them. With the OSRAM Wire Harness AX 2LS, the OSRAM LEDriving driving and working lights, can now be installed quickly and easily on the appropriate vehicle. The OSRAM Wire Harness AX 2LS is a wire harness that is suitable for the installation of two light sources with one lighting function. It also has an integrated on/off switch that can be installed in the vehicles cabin to switch the OSRAM LEDriving working lights on or off as required. The switch is only to be used for the OSRAM LEDriving working lights. The OSRAM Wire Harness AX 2LS is suitable for 12V vehicles. OSRAM also offers a 2-year guarantee<sup>1</sup>).

# Product datasheet

## Technical data


### General Product Information

Global order reference	LEDDL ACC 102
------------------------	---------------

### Electrical Data

Nominal voltage	12.0 V
-----------------	--------

### Physical Attributes & Dimensions

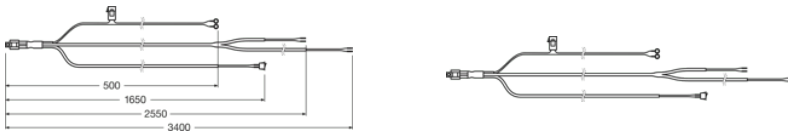

Product weight	348.00 g
----------------	----------

### Lifetime Data

Guarantee	2 years
-----------	---------

### Logistical data

Commodity code	85444290900
----------------	-------------

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4062172147729
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	51e3b950-f8a0-4278-9493-08b805138815







## Logistical Data

## Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172147729	Wire Harness AX 2LS	Folding carton box 1	175 mm x 81 mm x 177 mm	2.52 dm <sup>3</sup>	398.00 g
4062172147736	Wire Harness AX 2LS	Shipping carton box 8	362 mm x 335 mm x 190 mm	23.04 dm <sup>3</sup>	3629.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction LEDriving, Wire Harness AX 2LS
 User instruction GPRS_Safety symbols instructions
 Movie application LEDriving D and W Image Video Bringing light to life (EN)
 Movie application LEDriving Driving and Working Lights Reference Video (EN)
 Movie application OSRAM LEDdriving and working lights Imagefilm (EN)
 Movie application OSRAM Quality Testing LEDriving working and driving lights (EN)

#### Legal advice

Legal advice:

1) Precise terms and conditions at: [www.osram.com/am-guaranteeApplication](http://www.osram.com/am-guaranteeApplication) advice:

For more detailed application information and graphics please see product datasheet and user instruction.

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM